



Connectors > RF Coax Connectors > RF Connectors



RF Interface: **SSMA**
RF Connector Style: **Jack**
RF Connector Mated Outer Diameter (Approximate): **7.24 mm [.285 in]**
Impedance: **50 Ω**
RF Connector Coupling Mechanism: **Threaded**

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	SSMA
RF Connector Style	Jack
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Cable Connector Orientation	Straight
Body Material	Stainless Steel
Body Material Finish	Plated
Body Plating Material	Gold

Contact Features

RF Connector Center Contact Underplating Material	Copper, Nickel
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper



Termination Features

Termination Method to Wire & Cable	Solder Pot
------------------------------------	------------

Mechanical Attachment

RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Bulkhead
RF Contact Captivation Method	Epoxy

Dimensions

RF Connector Mated Outer Diameter (Approximate)	7.24 mm[.285 in]
---	------------------

Usage Conditions

Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Operating Frequency	38 GHz
---------------------	--------

Packaging Features

Packaging Method	Package
------------------	---------

Other

Comment	Captured Center Contact
Dielectric Material	PTFE

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2019 (197) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

TE Part # 1045489-1
1031 7188 02,OSSM CABLE PLUG

Also in the Series | AMP SSMA

In-Series Adapters(5)

RF Connectors(47)

Customers Also Bought

TE Part #3-1589488-7
STM037M5PQ = THRU-HOLE

TE Part #4-1589488-3
STM051M5PQ = THRU-HOLE

TE Part #533286-9
HDI PIN ASSY 4 ROW 240 POS R/A

TE Part #6-1589487-0
STM037M6IQ = THRU-HOLE






TE Part #1589946-8
STM037PC2DC018Q = Wdualobe



TE Part #1-830638-9
LGH-1L DBL MOLDED END LEAD

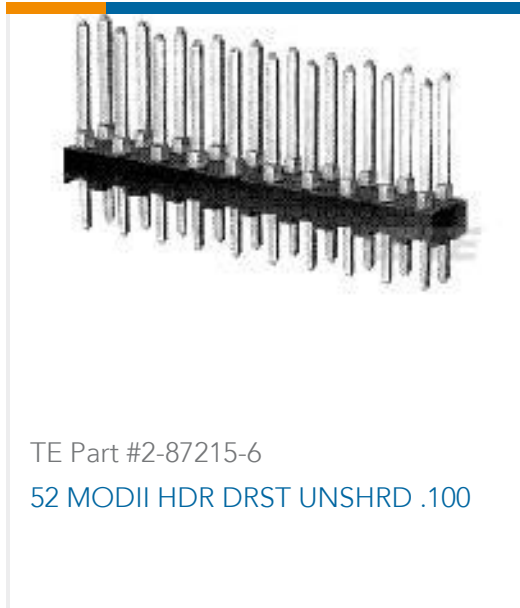

TE Part #2-87215-6
52 MODII HDR DRST UNSHRD .100



TE Part #91556-3
CCII AMP EI SERIES 26-20 HEAD



TE Part #1-2364573-6
AVH19 FLT SS LK R+P GRN 24V26A



TE Part #3-1437621-0
KAS500B1/8=KNOB BLK 1/8 SHAFT

Documents

Product Drawings

1056 0000 00

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1045629-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1045629-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1045629-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Products for Aerospace and Defense

English